

Tech Tip



From your friends at New York Bus Sales

Product Effected –All American “D3”

Complaint: *Driver’s are complaining of cold air in the driver’s area.*

Cause: *There is a “Fresh Air Vent” located in the driver’s compartment which may be open.*

Correction: *Quick check is to open the left wiper door (Figure #1) and look directly above and behind the power steering reservoir (Figure #2) to see if the vent is open.
If it is found to be open there is a vent lever just to the left of the steering column just in under dash (Figures # 3 & #4) which operates the vent.*

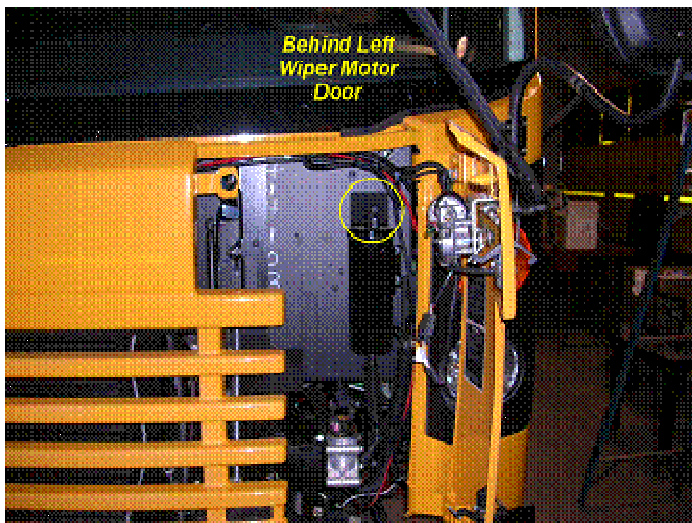


Figure #1

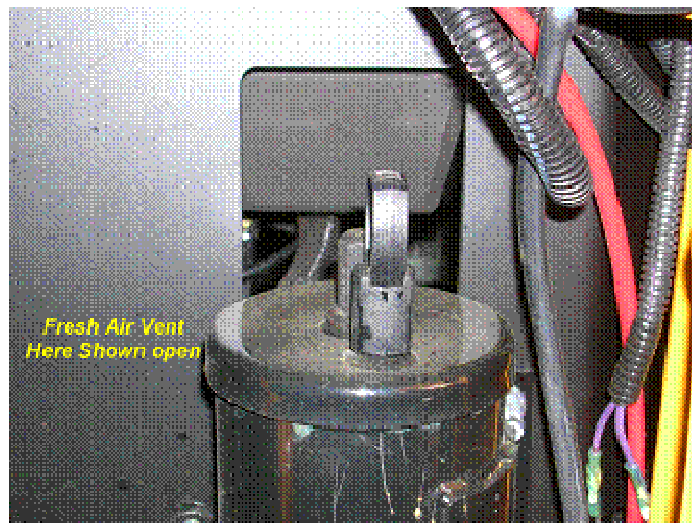


Figure #2

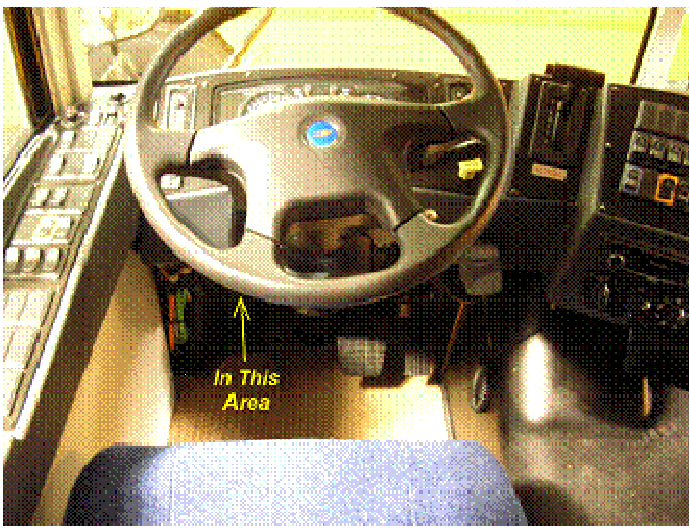


Figure #3

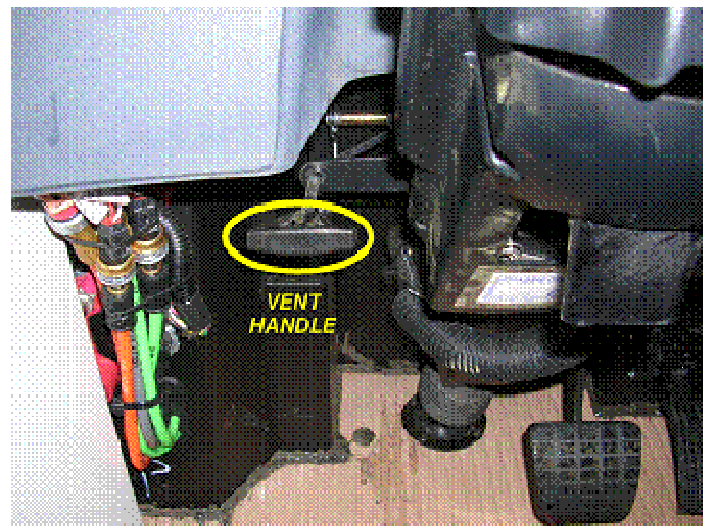


Figure #4



Contact Our Service Department With Any Questions

CHITTENANGO – phone 800-962-5768 or

Daryl Wallace : dwallace@newyorkbussales.com

Brian Lamaitis : blamaitis@newyorkbussales.com

ROCHESTER – phone 800-463-3232 or

Gary Chichester: gchichester@newyorkbussales.com

ALBANY – phone 866-867-1100 or

Ben Reiling: breiling@newyorkbussales.com

Steve Searles: ssearles@newyorkbussales.com

WARRANTY – 800-962-5768 ext 237

Morgan Jenkins: mjenkins@newyorkbussales.com

ALL of our Tech Tips can be found on the New York Bus Sales website at

<http://www.newyorkbussales.com/pages/bulletins.cfm>

Or at the New York Head Mechanic website at

<http://www.nyhma.org/viewforum.php?f=2&start=0>

